
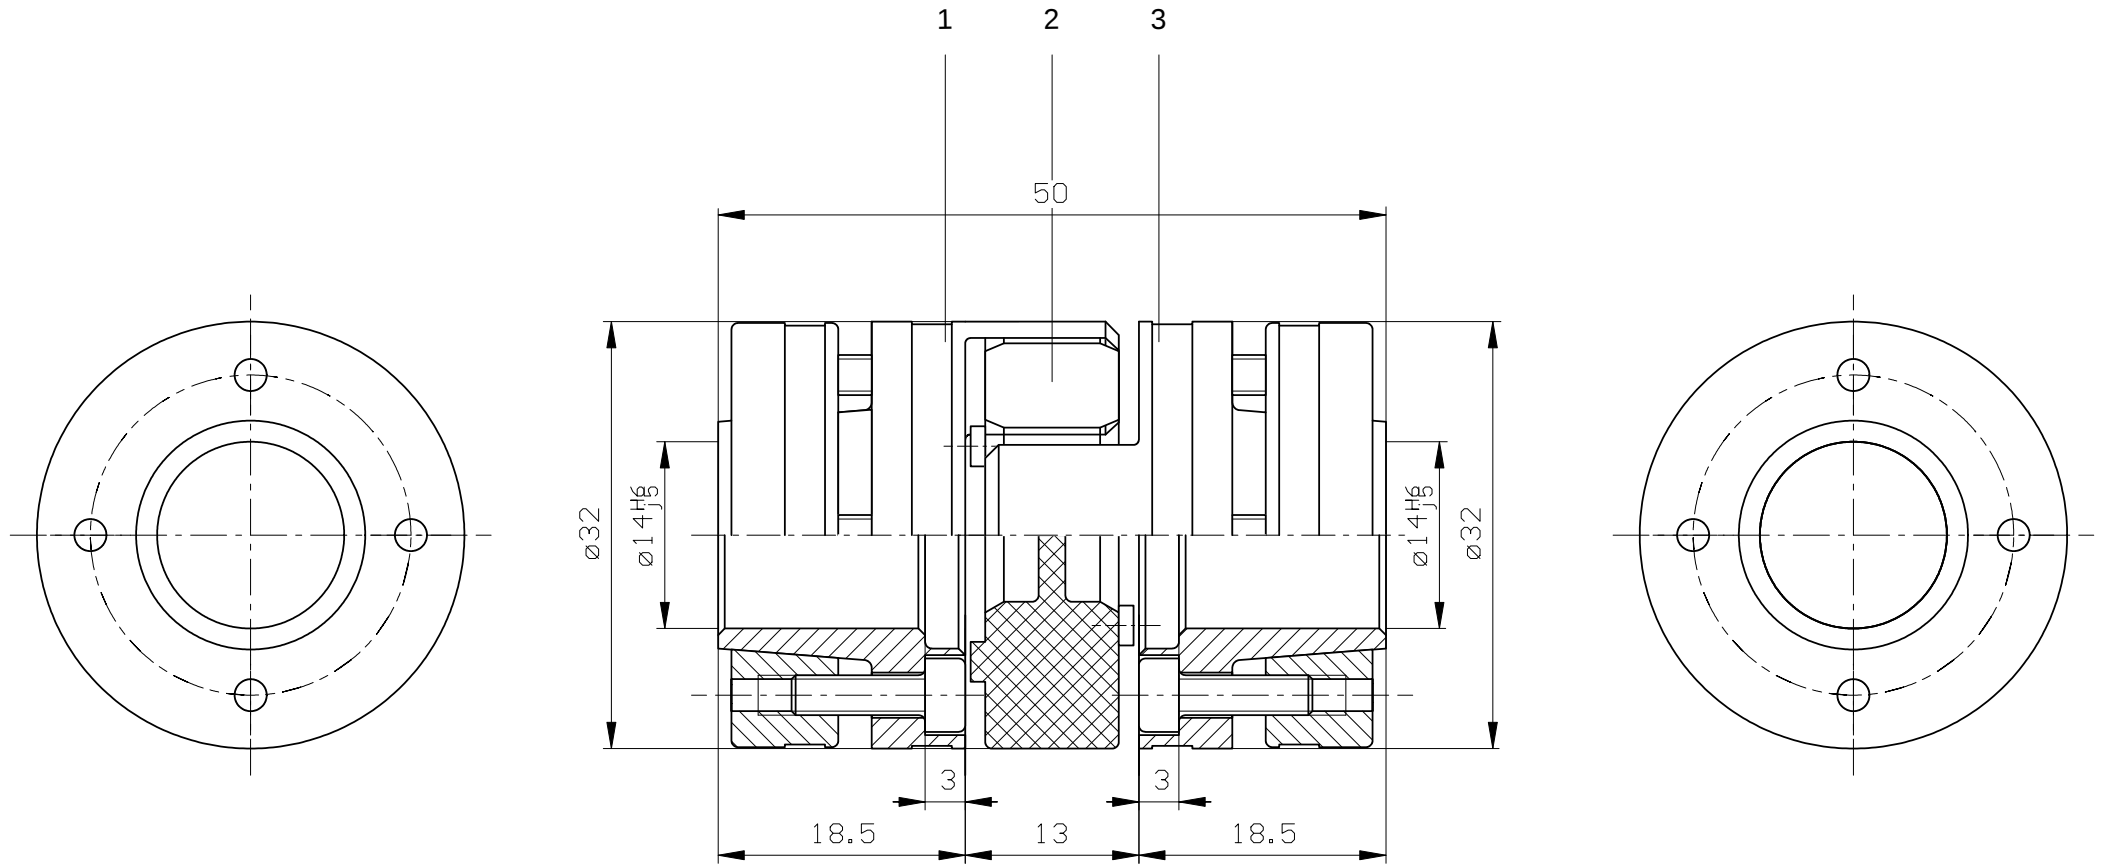




Drehmoment / Torque
 Zahnkranz / Spider 98 Sh A-GS
 Tkn = 12.5 Nm
 Tkmax = 25 Nm
 Tr(Ø14H7) rechts/right = 25 Nm
 Tr(Ø14H7) links/left = 25 Nm
 Teil 3: Schraubenanzugsmoment: 1.89 Nm
 Part 3: screw tightening torque
 Teil 1: Schraubenanzugsmoment: 1.89 Nm
 Part 1: screw tightening torque

We reserve the right to make dimensional and design changes.

Order details				
3	1	ROTEX GS-P 14 ST-H	Clamp. ring hub 6.0P Ø14H6	560145151480
2	1	ROTEX GS 14	spider 98 Sh-A-GS =P= red inside Ø8,	550141000095
1	1	ROTEX GS-P 14 ST-H	Clamp. ring hub 6.0P Ø14H6	560145151480
Pos.	No	Description		Part Number

		Oberflächengüte nach DIN ISO 1302 Reihe 2 Surface quality acc. to DIN ISO 1302 line 2			Schutzvermerk nach DIN 34 beachten Note protection mark acc. to DIN 34			
		Allgemeintoleranz nach DIN ISO 2768-mH General tolerances acc. to DIN ISO 2768-mH			Masstab Scale	1: 0.40	Format DIN Size	A3
		ROTEX® GS-P 14 Standard			 KTR Systems GmbH D-48407 Rheine			
		gezeichnet drawn	Werkstoff Material		Teilnummer Part Number	Kz	Lfd.-Nr. Current number	Index Change
		Datum date	29.04.2024	DIN				
		Name name		Gewicht Weight				