
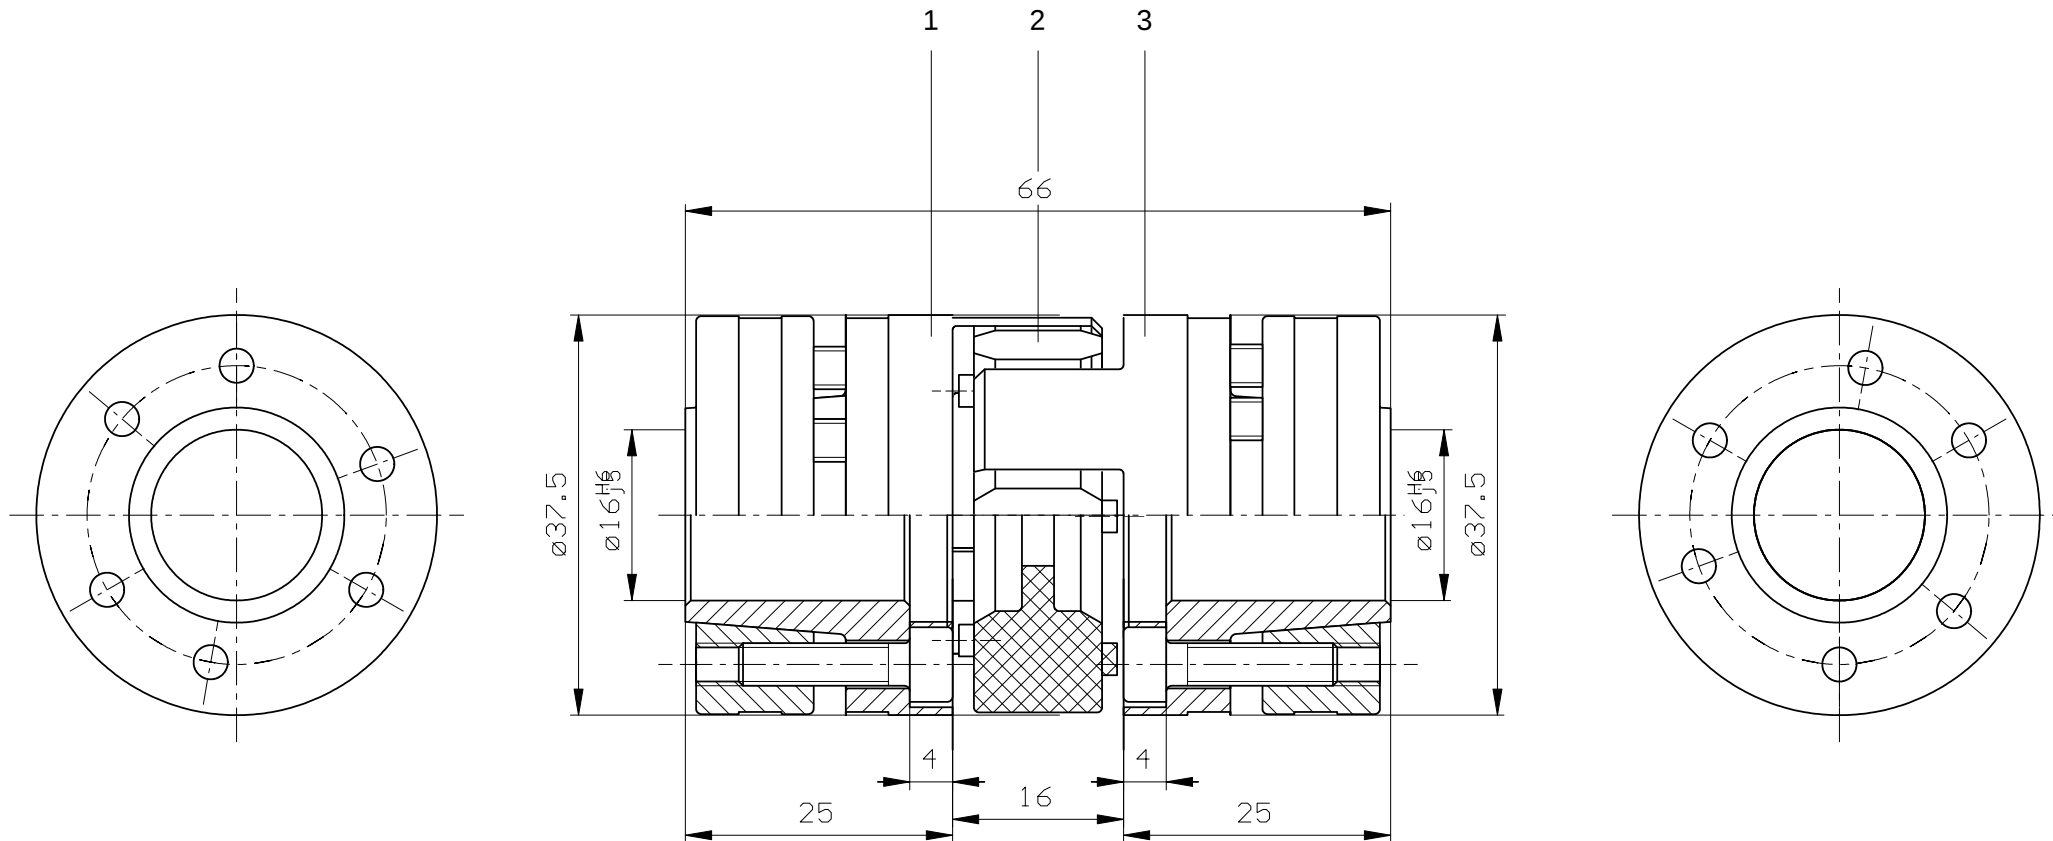




Drehmoment / Torque
 Zahnkranz / Spider 98 Sh A-GS
 Tkn = 14 Nm
 Tkmax = 28 Nm
 Tr(Ø16H7) rechts/right = 60 Nm
 Tr(Ø16H7) links/left = 60 Nm
 Teil 3: Schraubenanzugsmoment: 3.05 Nm
 Part 3: screw tightening torque
 Teil 1: Schraubenanzugsmoment: 3.05 Nm
 Part 1: screw tightening torque

We reserve the right to make dimensional and design changes.

Order details				
3	1	ROTEX GS-P 19 ST-H	Clamping ring hub Ø16H6 DH=37,5 asse	560195151685
2	1	ROTEX GS 19	Spider 98 Sh-A-GS red Ø9,5 =P=Ø37,4	550191000090
1	1	ROTEX GS-P 19 ST-H	Clamping ring hub Ø16H6 DH=37,5 asse	560195151685
Pos.	No	Description		Part Number

		Oberflächengüte nach DIN ISO 1302 Reihe 2 Surface quality acc. to DIN ISO 1302 line 2			Schutzvermerk nach DIN 34 beachten Note protection mark acc. to DIN 34			
		Allgemeintoleranz nach DIN ISO 2768-mH General tolerances acc. to DIN ISO 2768-mH			Masstab Scale	1: 0.50	Format DIN Size	A3
		ROTEX® GS-P 19 Standard			 KTR Systems GmbH D-48407 Rheine			
		gezeichnet drawn	Werkstoff Material		Teilnummer Part Number	Kz	Lfd.-Nr. Current number	Index Change
		Datum date	02.05.2024	DIN				
		Name name		Gewicht Weight				