



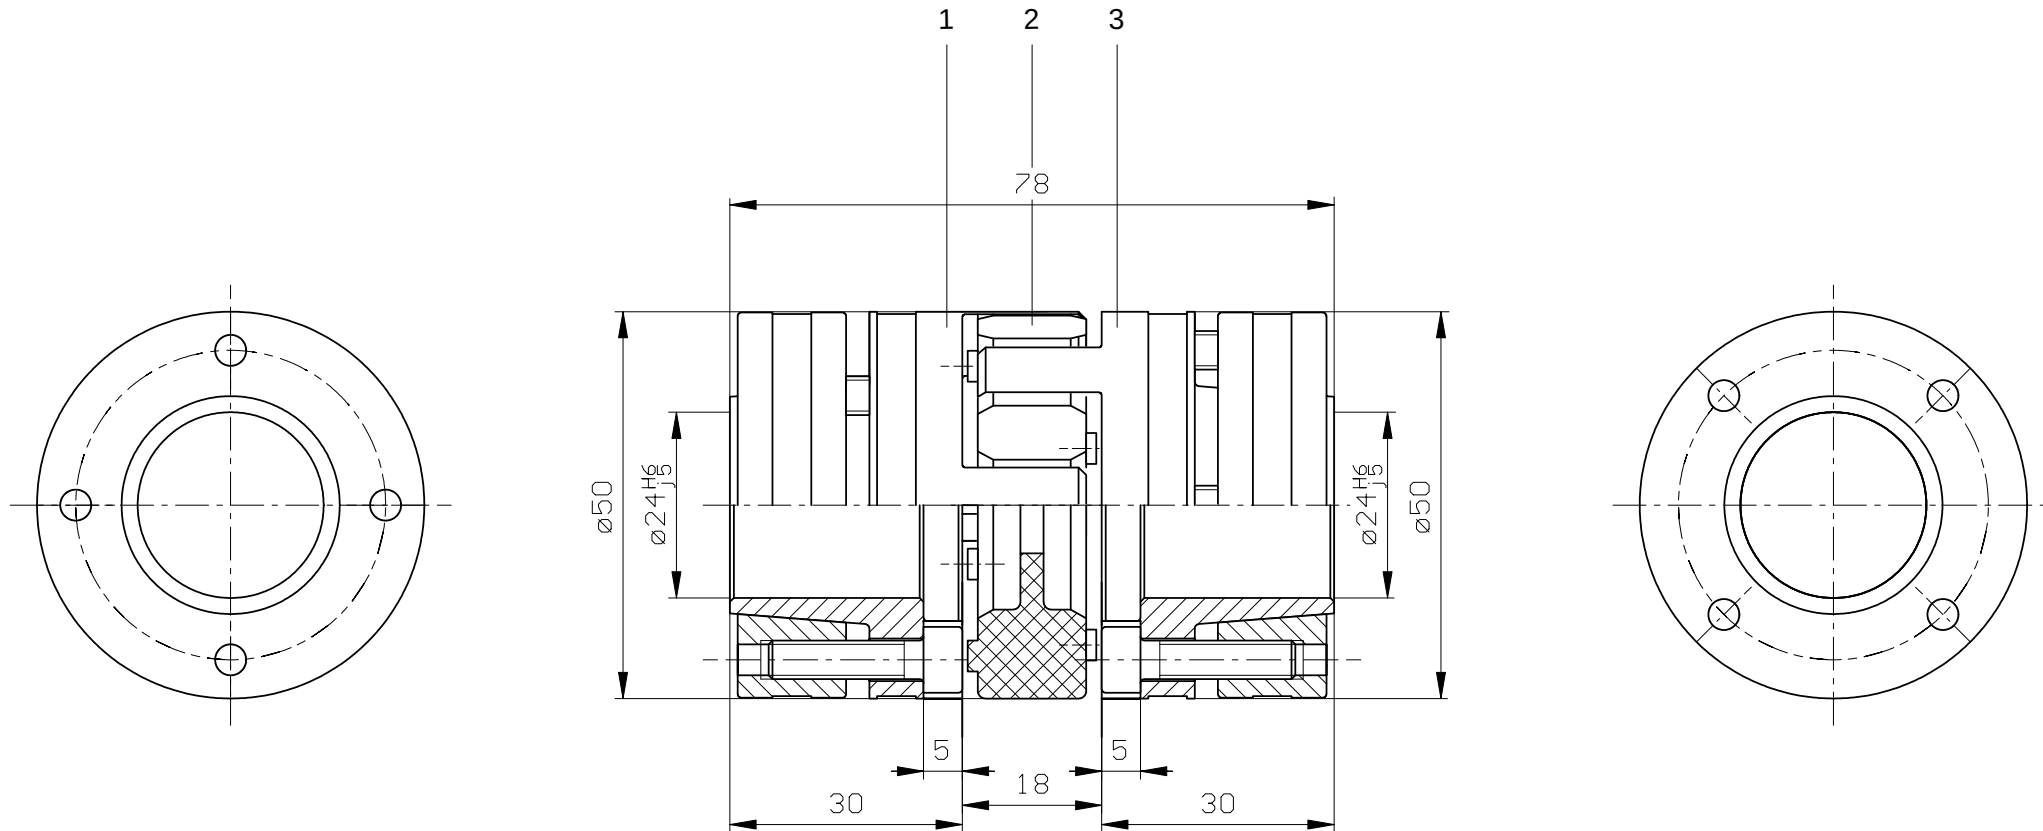

Drehmoment / Torque
 Zahnkranz / Spider 98 Sh A-GS
 Tkn = 43 Nm
 Tkmax = 86 Nm
 Tr(Ø24H7) rechts/right = 108 Nm
 Tr(Ø24H7) links/left = 108 Nm
 Teil 3: Schraubenanzugsmoment: 4.90 Nm
 Part 3: screw tightening torque
 Teil 1: Schraubenanzugsmoment: 4.90 Nm
 Part 1: screw tightening torque

We reserve the right to make dimensional and design changes.

		Oberflächengüte nach DIN ISO 1302 Reihe 2 Surface quality acc. to DIN ISO 1302 line 2			Schutzvermerk nach DIN 34 beachten Note protection mark acc. to DIN 34			
		Allgemeintoleranz nach DIN ISO 2768-mH General tolerances acc. to DIN ISO 2768-mH			Masstab Scale	1: 0.69	Format DIN Size	A3
		ROTEX® GS-P 24 Standard			 KTR Systems GmbH D-48407 Rheine			
		gezeichnet drawn	Werkstoff Material		Teilnummer Part Number	Kz	Lfd.-Nr. Current number	Index Change
		Datum date	05.05.2024	DIN				
		Name name		Gewicht Weight				



Order details

Pos.	No	Description	Part Number
3	1	ROTEX GS-P 24 ST-H	Clamping ring hub Ø24H6 DH=50 assemb
2	1	ROTEX GS 24	spider 98 Sh-A-GS red Ø12,5 =P= Ø49,
1	1	ROTEX GS-P 24 ST-H	Clamping ring hub Ø24H6 DH=50 assemb