
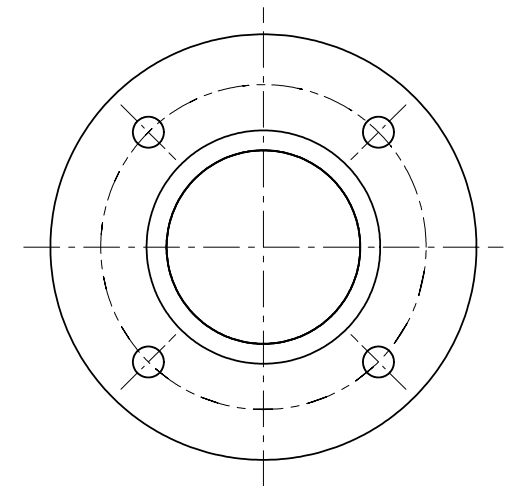
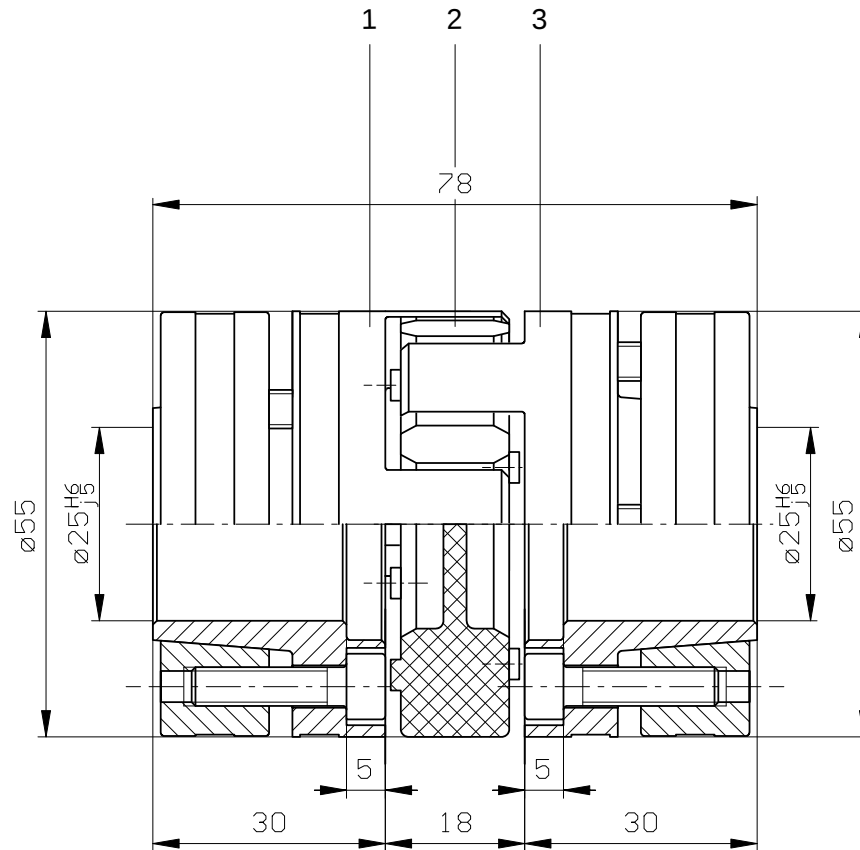


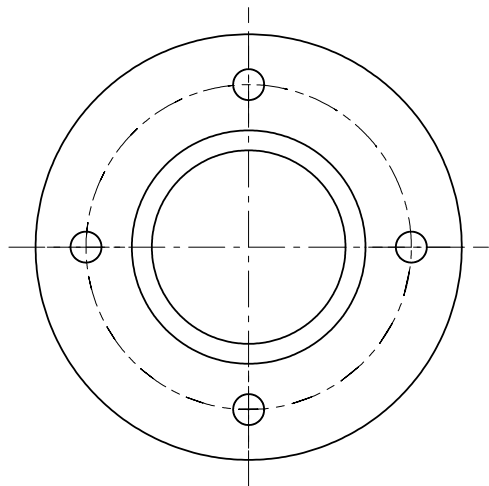

Drehmoment / Torque
 Zahnkranz / Spider 98 Sh A-GS
 Tkn = 60 Nm
 Tkmax = 120 Nm
 Tr(Ø25H7) rechts/right = 170 Nm
 Tr(Ø25H7) links/left = 170 Nm
 Teil 3: Schraubenanzugsmoment: 8.50 Nm
 Part 3: screw tightening torque
 Teil 1: Schraubenanzugsmoment: 8.50 Nm
 Part 1: screw tightening torque

We reserve the right to make dimensional and design changes.

Order details				
3	1	ROTEX GS-P 24 ST-H	Clamping ring hub Ø25H6 assembled w.	560245152580
2	1	ROTEX GS 24	spider 98 Sh-A-GS red =P= Ø12,5	550241000095
1	1	ROTEX GS-P 24 ST-H	Clamping ring hub Ø25H6 assembled w.	560245152580
Pos.	No	Description		Part Number

	Oberflächengüte nach DIN ISO 1302 Reihe 2 Surface quality acc. to DIN ISO 1302 line 2			Schutzvermerk nach DIN 34 beachten Note protection mark acc. to DIN 34			
	Allgemeintoleranz nach DIN ISO 2768-mH General tolerances acc. to DIN ISO 2768-mH			Masstab Scale	1: 0.69	Format DIN Size	A3
	ROTEX® GS-P 24 Standard			KTR Systems GmbH D-48407 Rheine			
	gezeichnet drawn	Werkstoff Material		Teilnummer Part Number	Kz	Lfd.-Nr. Current number	Index Change
Datum date	04.05.2024	DIN					
Name name		Gewicht Weight					