


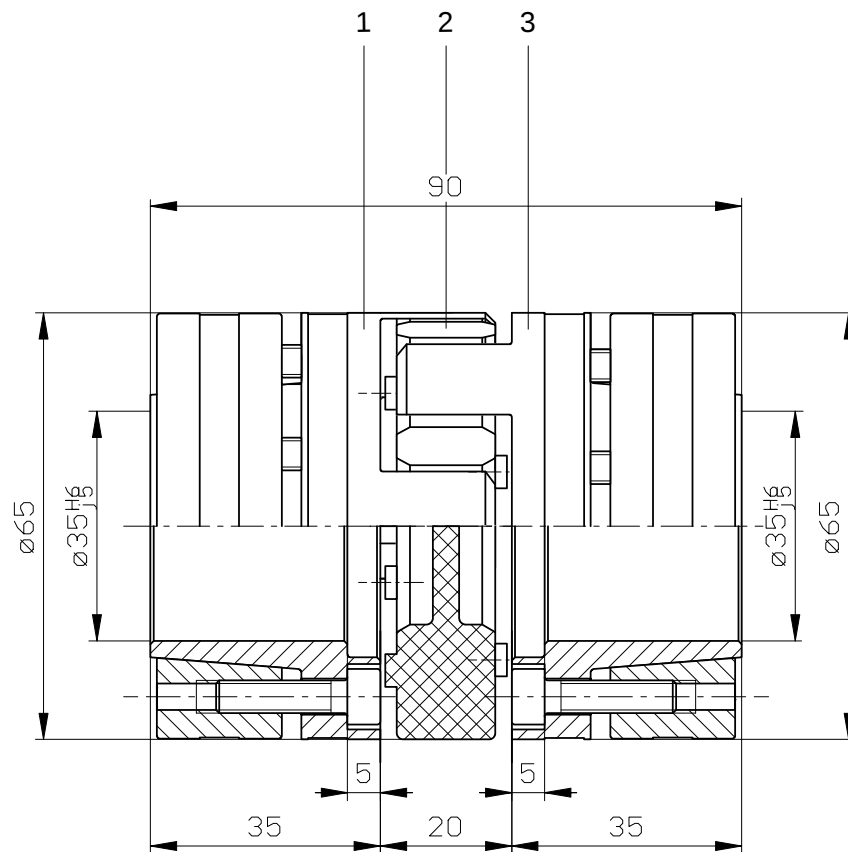

Drehmoment / Torque
 Zahnkranz / Spider 98 Sh A-GS
 Tkn = 160 Nm
 Tkmax = 320 Nm
 Tr(Ø35H7) rechts/right = 506 Nm
 Tr(Ø35H7) links/left = 506 Nm
 Teil 3: Schraubenanzugsmoment: 8.50 Nm
 Part 3: screw tightening torque
 Teil 1: Schraubenanzugsmoment: 8.50 Nm
 Part 1: screw tightening torque

We reserve the right to make dimensional and design changes.

Oberflächengüte nach DIN ISO 1302 Reihe 2
Surface quality acc. to DIN ISO 1302 line 2

Schutzvermerk nach DIN 34 beachten
Note protection mark acc. to DIN 34

Allgemeintoleranz nach DIN ISO 2768-mH
General tolerances acc. to DIN ISO 2768-mH

Masstab
Scale 1: 0.81 Format DIN A3

ROTEX® GS-P 28
Standard



KTR Systems
GmbH
D-48407 Rheine

Order details

Pos.	No	Description	Part Number
3	1	ROTEX GS-P 28 ST-H	Clamping ring hub Ø35H6 assembled w.
2	1	ROTEX GS 28	spider 98 Sh-A-GS =P= red inside Ø14
1	1	ROTEX GS-P 28 ST-H	Clamping ring hub Ø35H6 assembled w.
			Part Number

gezeichnet drawn	Werkstoff Material	Teilnummer Part Number	Kz	Lfd.-Nr. Current number	Index Change
Datum date 02.05.2024	DIN				
Name name	Gewicht Weight				

