


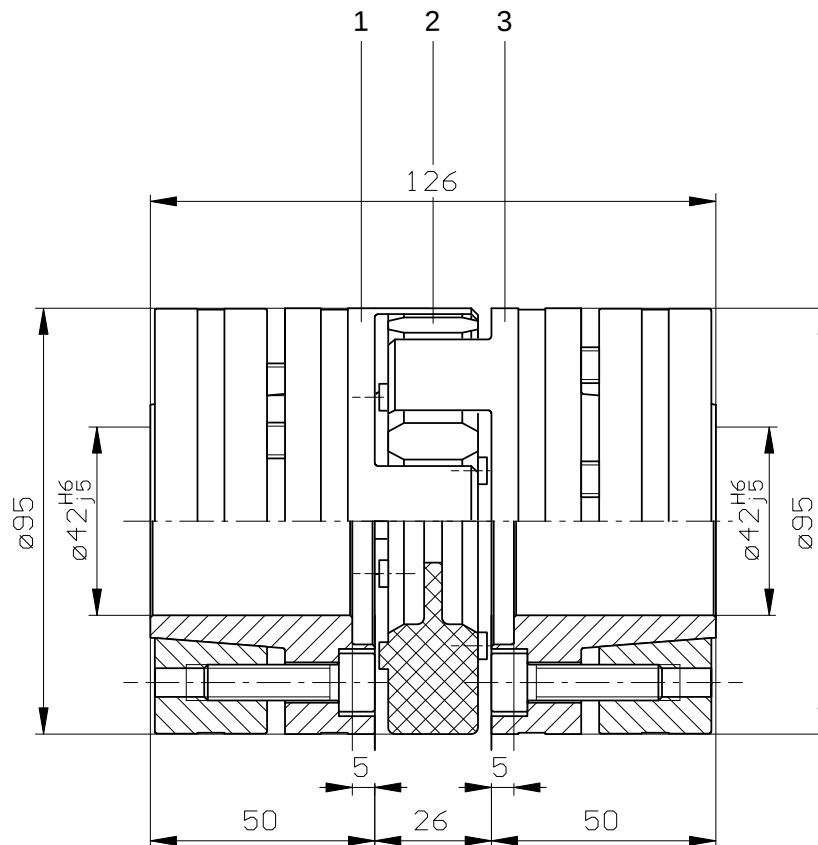

Drehmoment / Torque
 Zahnkranz / Spider 98 Sh A-GS
 Tkn = 450 Nm
 Tkmax = 900 Nm
 Tr(Ø42H7) rechts/right = 709 Nm
 Tr(Ø42H7) links/left = 709 Nm
 Teil 3: Schraubenanzugsmoment: 35 Nm
 Part 3: screw tightening torque
 Teil 1: Schraubenanzugsmoment: 35 Nm
 Part 1: screw tightening torque

We reserve the right to make dimensional and design changes.

Oberflächengüte nach DIN ISO 1302 Reihe 2
 Surface quality acc. to DIN ISO 1302 line 2

Schutzvermerk nach DIN 34 beachten
 Note protection mark acc. to DIN 34

Allgemeintoleranz nach DIN ISO 2768-mH
 General tolerances acc. to DIN ISO 2768-mH


Masstab
 Scale 1: 1.19 Format DIN A3

ROTEX® GS-P 42
Standard

KTR
 KTR Systems
 GmbH
 D-48407 Rheine

Order details

Pos.	No	Description	Part Number
3	1	ROTEX GS-P 42 ST-H	clamping ring hub Ø42H6 WITHOUT KEYW
2	1	ROTEX GS 42	spider 98 Sh-A-GS red inside Ø18,5
1	1	ROTEX GS-P 42 ST-H	clamping ring hub Ø42H6 WITHOUT KEYW
Pos.	No	Description	Part Number



gezeichnet drawn	Werkstoff Material	Teilnummer Part Number	Kz	Lfd.-Nr. Current number	Index Change
Datum date 05.05.2024	DIN				
Name name	Gewicht Weight				