


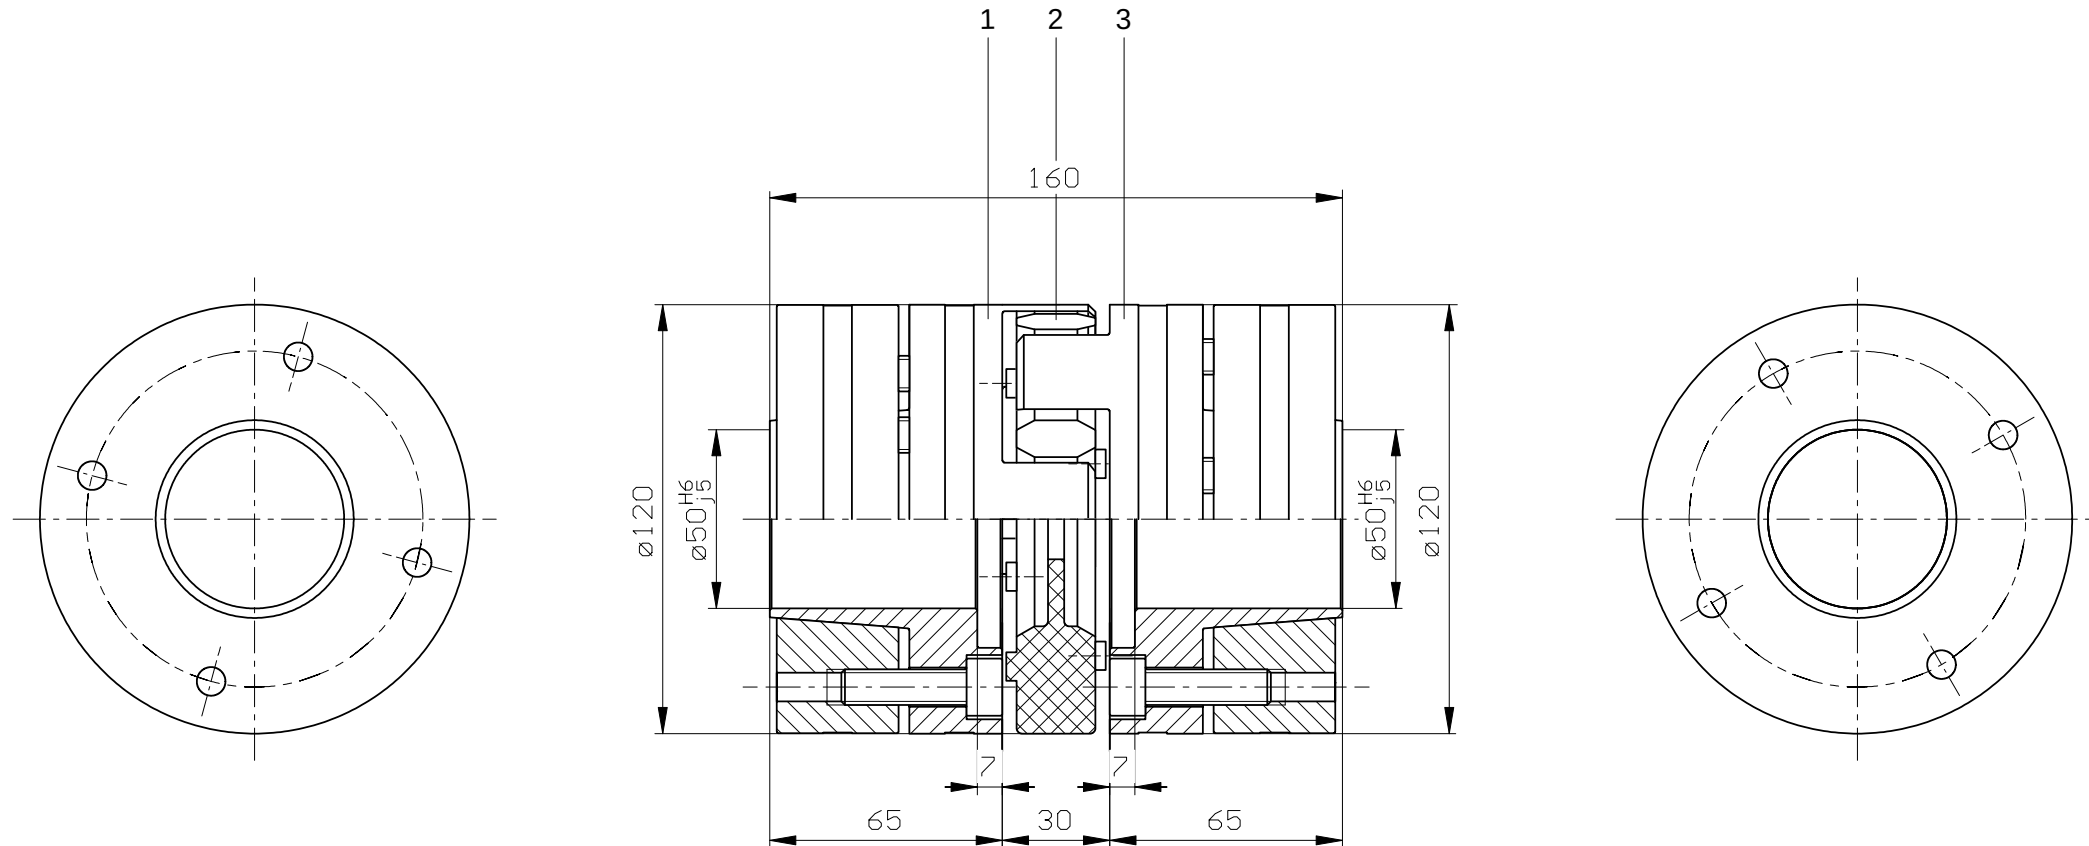

Drehmoment / Torque
 Zahnkranz / Spider 98 Sh A-GS
 Tkn = 685 Nm
 Tkmax = 1370 Nm
 Tr(Ø50H7) rechts/right = 1510 Nm
 Tr(Ø50H7) links/left = 1510 Nm
 Teil 3: Schraubenanzugsmoment: 69 Nm
 Part 3: screw tightening torque
 Teil 1: Schraubenanzugsmoment: 69 Nm
 Part 1: screw tightening torque

We reserve the right to make dimensional and design changes.

		Oberflächengüte nach DIN ISO 1302 Reihe 2 Surface quality acc. to DIN ISO 1302 line 2			Schutzvermerk nach DIN 34 beachten Note protection mark acc. to DIN 34			
		Allgemeintoleranz nach DIN ISO 2768-mH General tolerances acc. to DIN ISO 2768-mH			Masstab Scale	1: 1.49	Format DIN Size	A3
		ROTEX® GS-P 55 Standard			 KTR Systems GmbH D-48407 Rheine			
		gezeichnet drawn	Werkstoff Material		Teilnummer Part Number	Kz	Lfd.-Nr. Current number	Index Change
		Datum date	08.05.2024	DIN				
		Name name		Gewicht Weight				

Order details

3	1	ROTEX GS-P 55 ST-H	SPANNRINGNABE Ø50H6 m. SPANNRING kom	560555155080
2	1	ROTEX GS 55	spider 98 Sh-A-GS red inside Ø22,5	550551000002
1	1	ROTEX GS-P 55 ST-H	SPANNRINGNABE Ø50H6 m. SPANNRING kom	560555155080
Pos.	No	Description		Part Number

